


High Resolution SmartDome Camera


SCC-C7433/C7435 NEW

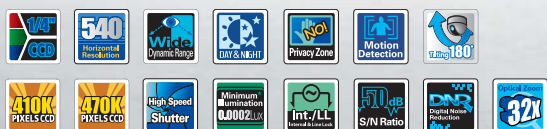

Features

- 1/4" 410K/470K pixels Ex-View HAD PS CCD (SCC-C7435)
1/4" 410K/470K pixels Super HAD IT CCD (SCC-C7433)
- 32x optical zoom lens (16x D-zoom)
- High resolution : 540(Color)/570(BW) TV lines
- Day & Night (moving filter)
- Minimum scene illumination :
(SCC-C7435 : 0.001 Lux (15 IRE, 256x Sens-up, Color)
SCC-C7433 : 0.002 Lux (15 IRE, 256x Sens-up, Color))
- 128x(NTSC) / 160x(PAL) WDR function (SCC-C7435)
- Full auto focus function
- Pan (max 400°/sec), tilt (200°/sec)
- 360° endless pan(slip-ring), 0~180° tilt
- RTC function for schedule setting
- Multi-protocol (more than 8 companies), multi-OSD
- Remote control : RS485(half & full duplex)/RS-422
- Operating temp.(-45°C~50°C) with fan / heater
- Water / dust resistant(IP66)

Dimensions (unit:mm)

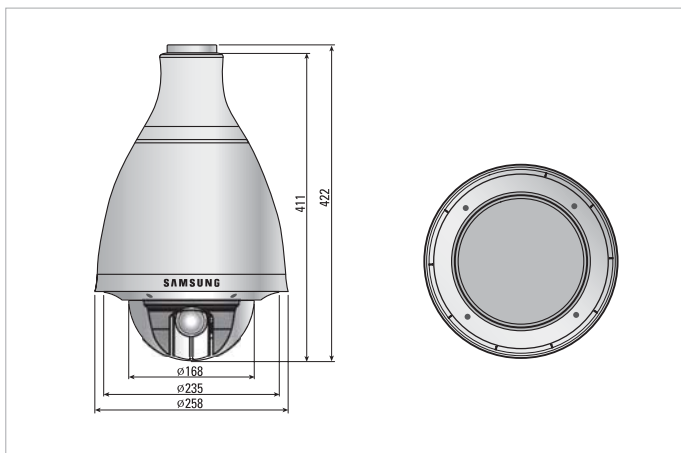

Specifications

Model			SCC-C7433(P)	SCC-C7435(P)
Camera Type			Color	
Image	Device		1/4" Super-HAD IT CCD	1/4" Ex-View-HAD CCD
	Effective Pixels		NTSC : 768 x 494 / PAL : 752 x 582	
Min. Scene Illumination	Color		0.6 Lux(15IRE,Sens-up Off)	0.3 Lux(15IRE,Sens-up Off)
			0.002 Lux(15IRE, Sens-up 256x)	0.001 Lux(15IRE, Sens-up 256x)
	B/W		0.06 Lux(15IRE,Sens-up Off)	0.03 Lux(15IRE,Sens-up Off)
PAN/TILT	Speed	Manual Pan	0 ~180°/sec	
		Preset Pan	400°/sec	
		Manual Tilt	0.1 ~90°/sec	
		Preset Tilt	200/sec	
	Range	Panning	0 ~360°/sec (Endless)	
		Tilting	0 ~180°	
	Number of Auto PAN		4	
	Number of Preset		128	
	Number of Pattern		3	
	Functions	Number of Privacy Zone		16
Day & Night		Color/BW/Auto (Moving Filter)		
Line Lock		INT/Line Lock		
White Balance		ATW1/ATW2/AWC/MANUAL		
D-Zoom		Yes(~16x)		
High Speed Shutter		Yes (OFF ~ 1/10K)		
Motion Detection		Yes		
Sens Up		Yes(2x ~ 256x)		
Camera ID		Max 20 Character		
Remote Control		RS485(Half&Full Duplex)/RS422		
Alarm		Input	8	
		Output	3(Open Collector 1 relay)	
Wide Dynamic Range		N/A	Yes	
Horizontal Resolution			540(Color)/570(BW) TV Lines	
Video Output			VBS 1.0Vp-p	
S/N Ratio			about 50 dB	
Lens	Focal Length		3.55 ~ 113mm	
	Zoom ratio		32x Optical	
	Aperture Ratio		F1.69(W)/F4.2(T)	
	Viewing Angle	Tele	1.78°(H) x 1.34°(V)	
		Wide	56.41°(H) x 43.01°(V)	
Operating Temperature			-45°C ~ + 50°C	
Operating Humidity			Less than 90%	
Power Requirement			NTSC : AC24V, 60Hz / PAL : AC24V, 50Hz	
Power Consumption			24W (Only Camera) / 55W (With Fan & Heater)	
LED Indicator			Yes	
Dimensions			258(Ø) X 422(H)mm	
Weight			5,950g	
Color			Silver	